

5355 (Wiegand)
5352 (Serial)

ProxPro® Reader

Proximity Card Reader

Application

The ProxPro proximity card reader's weatherproof design and architecturally attractive enclosure allows easy mounting indoors or out.

Features

- Affords high reliability, consistent read range characteristics and low power consumption in a single, easy-to-install package.
- Features multicolor LED, internal or host control of the LED and/or beeper and a beeper "off" switch for silent operation.
- Provides Wiegand protocol interface compatibility with all standard access control systems.
- Offers an optional, fully integrated personal identification number keypad for heightened security.



ProxPro[®] Reader

Features

Mounting: mounting holes fit standard U.S.A. single-gang switch boxes (vertically mounted) to simplify installation. Field adjustable for mounting directly to metal, exhibiting only minimal effects on read range. A selectable jumper setting provides for improved performance.

Audiovisual indication: when a proximity card is presented to the reader, the red LED flashes green and the beeper sounds. The multicolor LED and beeper can also be controlled individually by the host system.

Diagnostics: on reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper, and initializes the reader's operation. An additional external loop-back test allows the reader outputs and inputs to be verified without the use of additional test equipment.

Indoor/outdoor design: sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments, providing reliable performance and a high degree of vandal resistance. Easily installed in any location, even with the optional keypad.

Easily interfaced: interfaces with all existing Wiegand protocol access control systems. Output data in Wiegand or Clock and Data format, plus optional RS232 and RS422 serial interfaces.

Security: includes a tamper switch to provide notification of reader tampering. Recognizes card formats up to 85 bits, with over 137 billion unique codes.

Keypad option: available with an optional, integrated weatherized keypad, which provides an additional level of security by allowing the use of a personal identification number (PIN). The keypad interfaces with the host system either by sending the keypad data over the data output lines, or via a direct connection to the host keypad interface.

Warranty: warranted against defects in materials and workmanship for life from date of shipment (see complete warranty policy for details).

Part numbers:

ProxPro Proximity Card Reader – Wiegand Interface/Clock and Data (configurable)

Base Part No.: 5355

Description: Wiegand interface, tri-state LED, internal beeper on

Options: • Color (gray or beige) • Keypad operation

• LED and beeper operation • Custom label


ProxPro Proximity Card Reader – Serial Interface

Base Part No.: 5352

Description: RS-232 or RS-422 Serial interface (configurable), tri-state LED, internal beeper on.

Options: • Color (gray or beige) • Keypad operation • Custom label

(Please see "How to Order Guide" for a description of the options and associated part numbers).

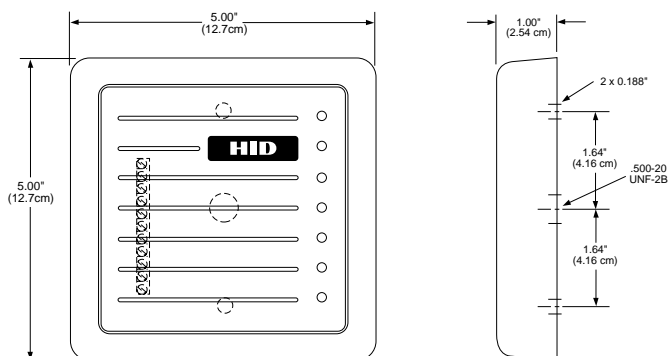

Specifications

Typical maximum* read range:

ProxCard[®] II card - up to 8" (20 cm)

ISOProx[®] II card - up to 7" (17.5 cm)

ProxKey[™] II keyfob - up to 3" (7.5 cm)

ProxCard[®] Plus card - up to 3" (7.5 cm)

SmartProx[™] card - up to 5" (12.5 cm)

*Depending on local installation conditions.

Dimensions: 5.0" x 5.0" x 1.0" (12.7 x 12.7 x 2.54 cm)

Material: Polycarbonate UL 94

Power supply: 10-28.5 VDC; Linear power supplies recommended. Reverse voltage protection included.

Current requirements: Average: 100 mA (12 VDC)
Peak: 120 mA (24 VDC)

Operating temperature: -22° to 150° F (-30° to 65° C)

Operating humidity:

0-95% relative humidity non-condensing

Weight: 12 oz. (336 gm)

Transmit frequency: 125 kHz

Excite frequency: 125 kHz

Certifications:

Canada/UL 294 Listed: Access Control System Units

FCC Certification, United States

Canada Certification

CE Mark, Fifteen EU Countries under the R&TTE

Directive (EN60950 - ITE Electrical Safety, EN 300

330 - SRD, and ETS 300 683 - EMC)

IEC60950, ITE CB Scheme Electrical Safety

Australia C-Tick Mark

New Zealand EMC

Cable distance:

Wiegand or Clock and Data interface: 500 feet (152 m)

RS-232 interface: 50 feet (15 m)

RS-422 interface: 4000 feet (1219 m)

Recommended cable is ALPHA 1295 (22 AWG) 5

conductor stranded with overall shield or equivalent.

Additional conductors may be required for LED or

beeper control.

RS-422 requires ALPHA 6212C 2-Twisted Pair,

shielded cable with drain wire, or equivalent for

data, plus ALPHA 1292C two-conductor shielded or

equivalent for DC power.

LIT5355DS 3/01, supersedes 8/00

www.HIDCorp.com



9292 Jeronimo Road
Irvine, CA 92618-1905 U.S.A.
(949) 598-1600
(800) 237-7769
FAX (949) 598-1690

