


FEATURE INDICATION  
MODEL NAME CODING RULE  
MANUAL IRIS  
AUTO IRIS  
VARI-FOCAL MANUAL IRIS  
VARI-FOCAL AUTO IRIS  
MANUAL ZOOM  
MOTORIZED ZOOM  
PINHOLE ACCESSORIES  
MEGAPIXEL & FA  
TECHNICAL INFORMATION  
ANGLE OF VIEW

- VARI
- MANUAL
- F1.0
- ASP
- IR



NEW


| MODEL NO.  | T3Z2910CS-IR     |
|--|------------------|
| Format (")   | 1/3              |
| Mount  | CS               |
| Focal Length (mm)                                    | 2.9-8.2          |
| Aperture (F)   | 1.0-16C          |
| Angle of View (HOR)°                                 | 95.0-35.6        |
| M.O.D. (m)   | 0.5              |
| Effective Aperture                                   | Front (φmm) 19.0 |
|  | Rear (φmm) 8.5   |
| Front Filter Thread (φMxP=)                          | -                |
| Dimensions (φxD <sub>1</sub> ), (φxHxD) or (WxHxD)mm | φ36.5 × 44.3     |
| Weight (g)   | 44               |

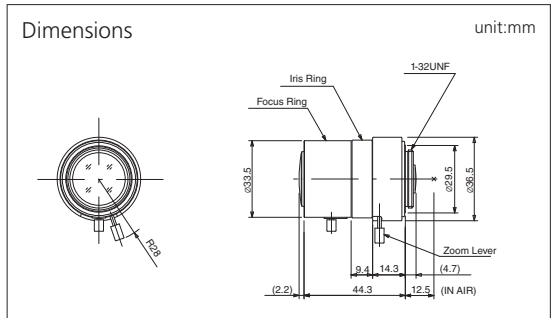

- VARI
- MANUAL
- F1.0
- ASP




| MODEL NO.  | T3Z3510CS        |
|--|------------------|
| Format (")   | 1/3              |
| Mount  | CS               |
| Focal Length (mm)                                    | 3.5-10.5         |
| Aperture (F)   | 1.0-16C          |
| Angle of View (HOR)°                                 | 81.6-27.2        |
| M.O.D. (m)   | 0.3              |
| Effective Aperture                                   | Front (φmm) 18.5 |
|  | Rear (φmm) 10.1  |
| Front Filter Thread (φMxP=)                          | -                |
| Dimensions (φxD <sub>1</sub> ), (φxHxD) or (WxHxD)mm | φ41.6 × 48.8     |
| Weight (g)   | 63               |

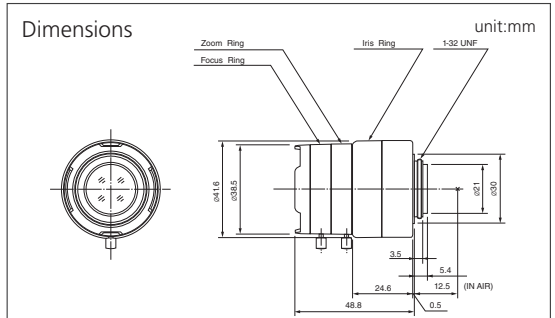

- VARI
- MANUAL
- F1.0
- ASP
- IR



| MODEL NO.  | T3Z3510CS-IR     |
|--|------------------|
| Format (")   | 1/3              |
| Mount  | CS               |
| Focal Length (mm)                                    | 3.5-10.5         |
| Aperture (F)   | 1.0-16C          |
| Angle of View (HOR)°                                 | 81.8-27.2        |
| M.O.D. (m)   | 0.3              |
| Effective Aperture                                   | Front (φmm) 18.6 |
|  | Rear (φmm) 10.2  |
| Front Filter Thread (φMxP=)                          | -                |
| Dimensions (φxD <sub>1</sub> ), (φxHxD) or (WxHxD)mm | φ41.6 × 48.8     |
| Weight (g)   | 63               |

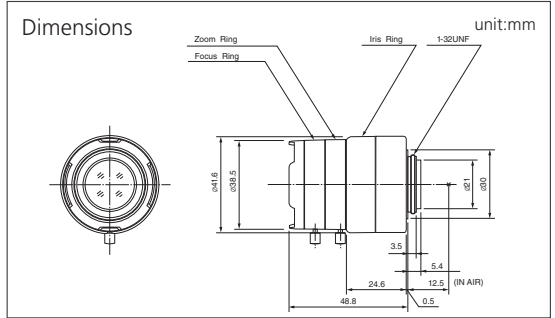


- VARI
- MANUAL
- ASP
- IR



NEW

| MODEL NO.  | T4Z2813CS-IR     |
|--|------------------|
| Format (")   | 1/3              |
| Mount  | CS               |
| Focal Length (mm)                                    | 2.8-12           |
| Aperture (F)   | 1.3-16C          |
| Angle of View (HOR)°                                 | 102.2-23.7       |
| M.O.D. (m)   | 0.3              |
| Effective Aperture                                   | Front (φmm) 23.0 |
|  | Rear (φmm) 7.4   |
| Front Filter Thread (φMxP=)                          | -                |
| Dimensions (φxD <sub>1</sub> ), (φxHxD) or (WxHxD)mm | φ40.7 × 56.0     |
| Weight (g)   | 63               |

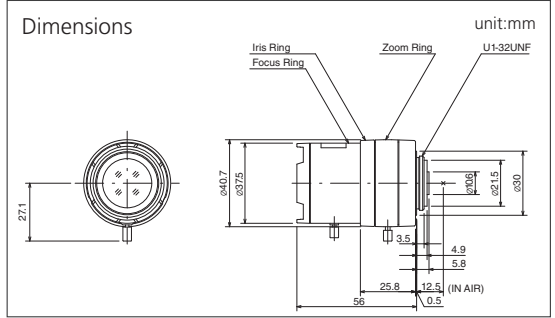

- VARI
- MANUAL
- TELE
- ASP



| MODEL NO.  | T10Z0513CS-2     |
|--|------------------|
| Format (")   | 1/3              |
| Mount  | CS               |
| Focal Length (mm)                                    | 5-50             |
| Aperture (F)   | 1.3-16C          |
| Angle of View (HOR)°                                 | 51.8-5.6         |
| M.O.D. (m)   | 0.8              |
| Effective Aperture                                   | Front (φmm) 29.5 |
|  | Rear (φmm) 8.7   |
| Front Filter Thread (φMxP=)                          | 37.5 × 0.5       |
| Dimensions (φxD <sub>1</sub> ), (φxHxD) or (WxHxD)mm | φ47 × 57.7       |
| Weight (g)   | 125              |

