

MDC-1220VW

MDC-6220F

BULLET CAMERA



GENERAL FEATURUES

- 1/3" SONY Super HAD Color CCD (410K Pixels)
- 540 TV Lines
- Ultra High Sensitivity : 0.15Lux at F1.2
- BLC / AGC / ESC etc.
- 3.5~16mm Vari Focal Fixed Iris Lens
- External Adjustable Focal length & Focus
- 30 ϕ Housing Weatherproof
- DC12V Power Source

MDC-6220F (TYPE)

- Digital Signal Processing
- BLC / AGC / ESC etc.
- 3.6mm Board Lens
- 21.5 ϕ Housing
- Weatherproof




DIMENSIONS(mm)

MDC-1220VW



MDC-6220F

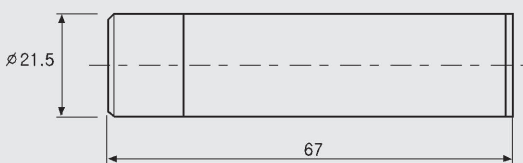

SPECIFICATIONS

MODEL	MDC-1220VW / MDC-6220F	
ITEM	NTSC	PAL
Image Sensor	1/3" Sony Super HAD Color CCD	
Effective Pixel	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	540TV Lines	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
S/N Ratio	More than 50dB (AGC off)	
Sync System	Internal	
Lens	3.5~16mm Varifocal Fixed Iris / 3.6mm Fixed	
Min. Illumination	0.15 Lux(Color) at F 1.2 / 0.5 Lux(Color) at F 1.2	
White Balance	ATW / AWC / MANUAL	
Video Output	Composite 1.0Vp-p(75 Ω load)	
Power Supply	DC12V \pm 10%	
Operating Temp.	-10 $^{\circ}$ C ~ +50 $^{\circ}$ C	
Operating Humidity	90% RH max.	
Dimension (m/m)	ϕ 30 / ϕ 21.5 x 67	