

MDC-6220VTD-42

BULLET CAMERA



GENERAL FEATURUES

- 1/3" SONY Super HAD Color CCD (410K Pixels)
- 540 TV Lines
- Built-in 2.8~11mm Filter changeable Varifocal DC Auto Iris Lens
- Built-in 42pcs IR LEDs
- Multi OSD function built-in
 - Privacy, Motion Detection, etc.
- Cable Built-in Bracket
- Weatherproof Housing (IP66)
- DC12V Power Source



1/3" SONY
COLOR CCD



540




2.8~11mm



DAY NIGHT

DIMENSIONS(mm)

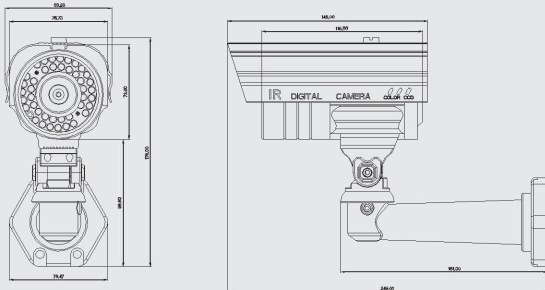

SPECIFICATIONS

MODEL	MDC-6220VTD-42	
ITEM	NTSC	PAL
Image Sensor	1/3" Sony Super HAD Color CCD	
Effective Pixel	768(H) × 494(V) 380K	752(H) × 582(V) 440K
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	540TV Lines	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
S/N Ratio	More than 50dB (AGC off)	
Sync System	Internal	
Lens	2.8~11mm ICR Varifocal DC Auto Iris Lens	
Min. Illumination	0.5 Lux(Color) / 0.05 Lux(B/W) at F 1.2 / 0 Lux at IR-Led ON	
White Balance	ATW / AWC / MANUAL	
Video Output	Composite 1.0Vp-p(75Ω load)	
Power Supply	DC12V ±10%	
Operating Temp.	-10°C ~ +50°C	
Operating Humidity	90% RH max.	
Dimension (m/m)	83.2 x 86.2 x 152	



(External adjustable
focal Lanh & Focus)