

MDC-6220VTD -42(V2)

BULLET CAMERA



GENERAL FEATURUES

- 1/3" SONY Super HAD Color CCD (410K Pixels)
- More than 580TV Lines (Color), 700TV Lines (B/W)
- Disk saving with DNR Technology
- Low Sensitivity of 0.001 Lux (Sens-up)
- Built-in 2.8~11mm Filter changeable Varifocal DC Auto Iris Lens
- Built-in 42pcs IR LEDs
- Multi OSD function built-in
 - Privacy, Motion Detection, HLC etc.
- Cable Built-in Bracket
- Weatherproof Housing (IP66)
- DC12V Power Source



1/3" SONY
COLOR CCD



580



2.8-11mm



DAY NIGHT




SENS-UP



DNR

DIMENSIONS(mm)

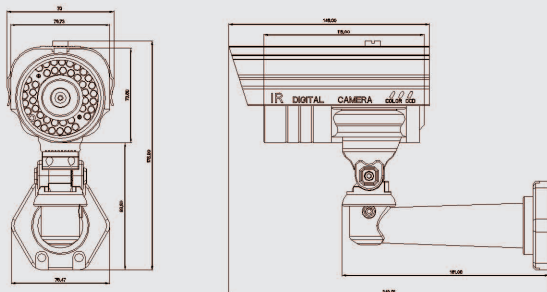

SPECIFICATIONS

| MODEL | MDC-6220VTD-42(V2) | |
|--------------------|---|-------------------------|
| ITEM | NTSC | PAL |
| Image Sensor | 1/3" Sony Super HAD Color CCD | |
| Effective Pixel | 768(H) x 494(V) 380K | 752(H) x 582(V) 440K |
| Scanning System | 525 Lines 2:1 Interlace | 625 Lines 2:1 Interlace |
| Scanning Frequency | 15.734KHz (H), 59.94Hz (V) | 15.625KHz (H), 50Hz (V) |
| Resolution | More than 580TV Lines (Color), 700TV Lines (B/W) | |
| Shutter Speed | 1/60 ~ 1/100,000 sec | 1/50 ~ 1/100,000 sec |
| S/N Ratio | More than 52dB (AGC off) | |
| Sync System | Internal | |
| Lens | 2.8~11mm ICR Varifocal DC Auto Iris Lens | |
| Min. Illumination | 0.15 Lux(Color) / 0.03 Lux(B/W) / 0.001(Sens-up) at F 1.2 / 0 Lux at IR-Led ON | |
| White Balance | ATW / AWC / MANUAL / OUTDOOR / INDOOR | |
| Video Output | Composite 1.0Vp-p(75Ω load) | |
| Power Supply | DC12V ±10% | |
| Operating Temp. | -10°C ~ +50°C | |
| Operating Humidity | 90% RH max. | |
| Dimension (m/m) | φ70 Housing : 83.2 x 79.2 x 146 | |



(External adjustable
focal Lanh & Focus)