

MDC-7220FDN

DOME CAMERA





GENERAL FEATURUES

- 1/3" SONY Super HAD Color CCD (410K Pixels)
- 540 TV Lines
- Digital Day / Night Capability
- Disk saving with DNR Technology
- Low Sensitivity of 0.002 Lux (Sens-up)
- 3.7mm Fixed Lens
- Multi OSD function built-in
 - Privacy, Motion Detection, Mirror etc.
- \varnothing 100 Indoor Dome Housing
- DC12V Power Source



DIMENSIONS(mm)

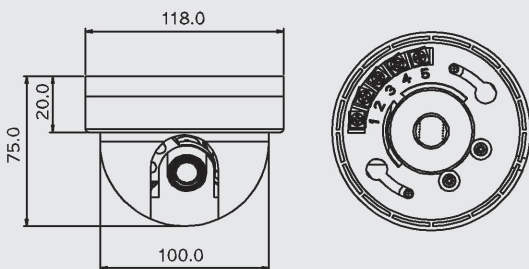

(\varnothing 100, 3Axis)

SPECIFICATIONS

MODEL	MDC-7220FDN	
ITEM	NTSC	PAL
Image Sensor	1/3" Sony Super HAD Color CCD	
Effective Pixel	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	540TV Lines	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
S/N Ratio	More than 50dB (AGC off)	
Sync System	Internal	
Lens	3.7mm Fixed Lens	
Min. Illumination	0.3 Lux(Color) / 0.002 Lux(Sens-up) at F 1.2	
White Balance	ATW / AWC / MANUAL	
Video Output	Composite 1.0Vp-p(75 Ω load)	
Power Supply	DC12V \pm 10%	
Operating Temp.	-10 $^{\circ}$ C ~ +50 $^{\circ}$ C	
Operating Humidity	90% RH max.	
Dimension (m/m)	100mm Dome size	