

PS-101

SPEED DOME CAMERA




GENERAL FEATURUES

- 100x Zoom (Optical 10x, Digital 10x)
- Ture Day & Night (ICR)
- DNR (Digital Noise Reduction)
- 128 Preset Positions
- 4 Pattern, 8 Group
- 4 Privacy zone
- Panning speed : MAX. 360°/sec
- DC12V
- Wall Mount Bracket (Option)



DIMENSIONS(mm)

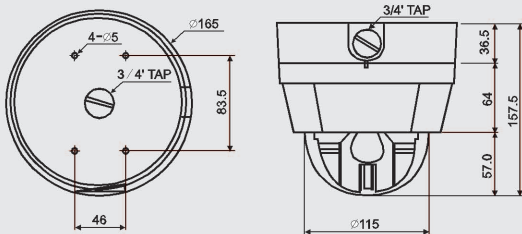

SPECIFICATIONS

MODEL	PS-101	
Signal System	NTSC	PAL
Image Sensor	1/4" SONY CCD	
Total/Effective Pixels	410K/380K	470K/440K
Resolution	500 TV Lines(Color), 570 TV Lines(B/W)	
Shutter speed	128x ~ 1/120,000 sec	
S/N Ratio	50dB(AGC Off)	
Zoom	x10 Optical Zoom, x10 Digital Zoom	
Min. Illumination	0.7Lux (Color)/0.02 Lux (B/W) @50 IRE	
Day & Night	Auto/Day/Night (ICR)	
Focus	Auto/Manual/Semi-Auto	
Iris	Auto/Manual	
Focal Length	F1.8, F=3.8-38mm	
AGC	Normal/High/Off	
BLC, SSNR	Low/Middle/High/Off	
White Balance	Auto/Manual (Red, Blue Gain Adjustable)	
Flickerless	Selectable	
Privacy Zone	4 Zones	
Range	Pan 360°(Endless)/Tilt 95	
Pan/Tilt Speed	Preset : 360°/sec Manual: 0.05 ~ 360°/sec	
Preset	Swing : 1 ~ 180°/sec 128 Preset positions	
Pattern	4 Patterns, about 5 minute/Pattern	
Swing/Group	8 Swings/8 Groups	
Communication	RS-485	
Protocol	Pelco-D, Pelco0-P selectable(RS-485)	
Alarm Input	4 Inputs	
Dimention	Dome : ϕ 115. Housing : ϕ 147.5 x 141 (H)mm	
Weight	Approx 1.2 Kg/2.6 Lbs	
Operating Temp	0 ~ 40° C	