MDC-8220F-MS/MF

DOME CAMERA

GENERAL FEATRUES

- 1/3" SONY Super HAD Color CCD (410K Pixels)
- 540TVL Resolution
- AGC / ATW / ESC
- Back Light Compensation
- 3.6mm Fixed Lens
- Mini size Vandal-proof Dome, 57Φ Polycarbonate Dome cover

DIMENSIONS(mm)

MDC-8220FDN-MS

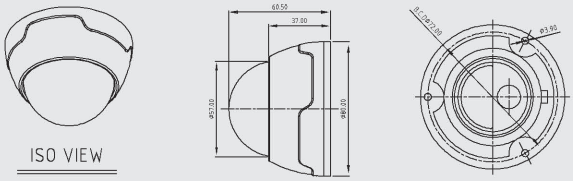

MDC-8220FDN-MF

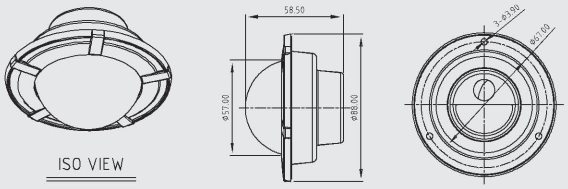

SPECIFICATIONS

MODEL	MDC-8220F-MS/MF	
ITEM	NTSC	PAL
Image Sensor	1/3"Sony Super HAD Color CCD	
Effective Pixel	768(H) ×494(V) 380K	752(H) ×582(V) 440K
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	540 TV Lines	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
S/N Ratio	More than 50dB (AGC off)	
Sync System	Internal	
Lens	3.6mm Fixed Lens	
Min. Illumination	0.5 Lux(Color) at F1.2	
White Balance	Auto	
Video Output	Composite 1.0Vp-p(75Ω load)	
Power Supply	DC12V ±10%	
Operating Temp.	-10℃ ~ +50℃	
Operating Humidity	90% RH max.	
Dimension (m/m)	Φ57, 80(W) x 60(H) size & Approximately, 230g	